A08617-000 | F0SC450-A4-4-NT-0-A1V



Product Classification

Product Type
Regional Availability
Product Series
Product Brand

FOSC[™]450 A4 Fiber Optic Splice Closure, Gel Cable sealing, no preinstalled tray, 4 cable attach., one ground feedthrough lug, with test valve

- Single-ended, O-ring sealed dome closure for splicing feeder and distribution cables
- Gel cable sealing technology allows easy adding or removing of a wide size range of cables
- Compatible with most common cable types: e.g. loose tube, central core, ribbon fiber
- FOSC splice trays hinged for access to any splice without disturbing other trays
- Closure can be used in aerial, pedestal and underground (up to 5 meters) environments
- Compatible with CommScope's CWDM modules and optical splitter trays

Single-ended, round fiber closure Latin America | North America

FOSC 450 FOSC™

General Specifications

Splicing Type, SupportedMass fusion | Single fusion

Splicing Capacity, Mass Fusion, maximum 144
Splicing Capacity, Single Fusion, maximum 96
Color Black
Network Area Type Feeder
Package, quantity 1

Packaging Type Box | Carton

Splice Tray Included, quantity 0
Splicing Capacity, Single Splice, 12 fibers, maximum 96
Splicing Capacity, Single Splice, 6 fibers, maximum 48

Dimensions

Main Cable Diameter, maximum 25.00 mm

 Diameter
 150.00 mm | 5.91 in

 Diameter, with clamp
 205 mm | 8 in

 Length
 485.00 mm | 19.09 in

 Weight
 2.72 kg | 6.00 lb


Dimension Drawing



page 1 of 3



A08617-000 | FOSC450-A4-4-NT-0-A1V

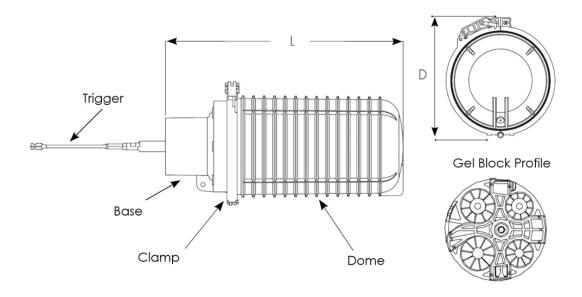

Mechanical Specifications

Cable Sealing TypeCompressed gel

Cable Entry Drop Port StyleRoundCable Entry Main Port StyleRoundCable Ports, quantity4

Closure Sealing Type Dome-to-base clamp with O-ring

Closure Style Single-ended
Fiber Storage Basket Type A4 standard size

Ground Feed-through Lugs, quantity

Material TypeImpact-resistant polymerMount TypePole | Strand | Wall

Environmental Specifications

Environmental SpaceBelow ground | BuriedQualification StandardIEC 61300, 5 m waterheadWater ResistanceFlash test valve at 5 psi (40 kPa)

Regulatory Compliance/Certifications

Agency Classification RoHS 2011/65/EU Compliant

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

page 2 of 3 August 8, 2019



A08617-000 | FOSC450-A4-4-NT-0-A1V





page 3 of 3 August 8, 2019