


# CABLE ASSEMBLIES

## LC-SC MM Duplex 62.5µm

**NOTES:**

1) SPC GR-326 GEOMETRIC REQUIREMENTS=> PROTRUSION / UNDERCUT:+50/-100nm

PERFORMANCE SPECIFICATIONS	
FIBER TYPE: MULTIMODE (62.5/125µm)	
	850/1310nm
INSERTION LOSS	0.3dB
TYPICAL INSERTION LOSS	0.2dB
MATING DURABILITY (500 cycles)	<0.2dB
TEMPERATURE RANGE	-40° C to 85° C

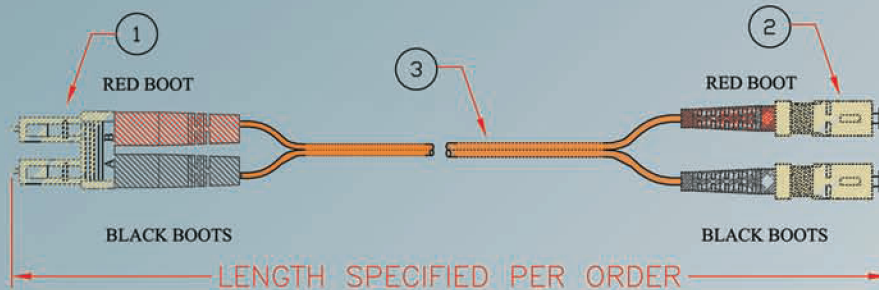

CORNING OPTICAL FIBER CABLE 62.5/125µm OFNR ZIPCORD 3mm  
 REQUIRED LENGTH TOLERANCE: +10.0cm / -0.0cm

ITEM	QTY.	DESCRIPTION	DRAWN BY:	DATE:	
1	2	LC DUPLEX MULTIMODE 127µm CONNECTOR	LUB	JAN-02-2007	
2	2	SC MULTIMODE 127µm CONNECTOR	SANDEV	JAN-02-2007	
3	1	CORNING MULTIMODE DUPLEX 62.5/125µm OFNR 3mm	SANDEV	JAN-02-2007	
4		N/A			

TITLE	P/N- LEGEND
LC-SC MM DX 62.5/125µm OFNR 3mm	N = INCHES F = FEET M = METER

LC-SC/DX/MM/62.5	PART NUMBER	AVAILABILITY
1 METER	LC-SC, MM62.5µm ORANGE DX PVC	STOCK
2 METER	LC-SC, MM62.5µm ORANGE DX PVC	STOCK
3 METER	LC-SC, MM62.5µm ORANGE DX PVC	STOCK
4 METER	LC-SC, MM62.5µm ORANGE DX PVC	STOCK
5 METER	LC-SC, MM62.5µm ORANGE DX PVC	STOCK
6 METER	LC-SC, MM62.5µm ORANGE DX PVC	STOCK
7 METER	LC-SC, MM62.5µm ORANGE DX PVC	STOCK
8 METER	LC-SC, MM62.5µm ORANGE DX PVC	STOCK
9 METER	LC-SC, MM62.5µm ORANGE DX PVC	STOCK
10 METER	LC-SC, MM62.5µm ORANGE DX PVC	STOCK
12 METER	LC-SC, MM62.5µm ORANGE DX PVC	STOCK
15 METER	LC-SC, MM62.5µm ORANGE DX PVC	STOCK
20 METER	LC-SC, MM62.5µm ORANGE DX PVC	STOCK
25 METER	LC-SC, MM62.5µm ORANGE DX PVC	STOCK
30 METER	LC-SC, MM62.5µm ORANGE DX PVC	STOCK