


NOTES:
1) SPC GR-326 GEOMETRIC
REQUIREMENTS=> PROTRUSION /UNDERCUT:+50/-100nm

PERFORMANCE SPECIFICATIONS	
FIBER TYPE: MULTIMODE (50/125um)	850/1310nm
INSERTION LOSS	0.3dB
TYPICAL INSERTION LOSS	0.2dB
MATING DURABILITY (500 cycles)	<0.2dB
TEMPERATURE RANGE	-40° C to 85° C

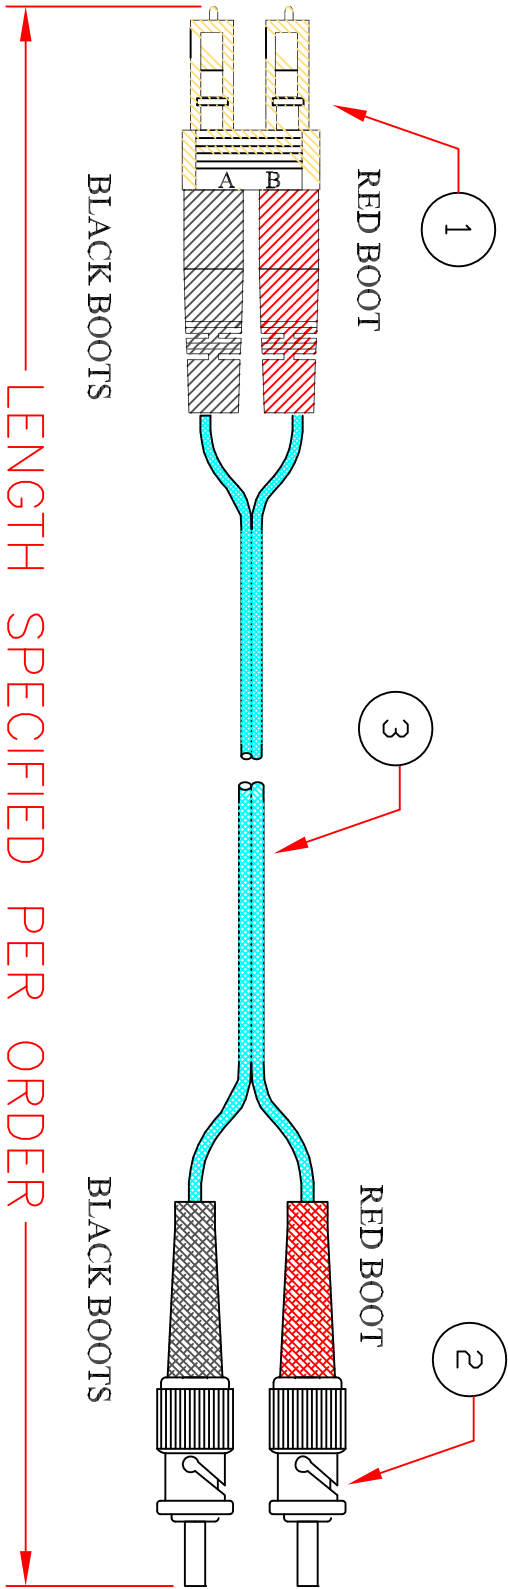

ITEM	QTY.	DESCRIPTION	PROPRIETARY AND CONFIDENTIAL				PART NUMBER:	P/N: LEGEND
1	2	LC DUPLEX MULTIMODE 127um CONNECTOR	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FIBER OPTIC SUPPLY ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION IS PROHIBITED.				LC-ST MM DX 50/125um, 10-GIG 2mm	N = INCHES F = FEET M = METER
2	2	ST MULTIMODE 127um CONNECTOR						
3		CORNING MULTIMODE DUPLEX 50/125um, 10-GIG AQUA, 2mm						
4		N/A						

DRAWN BY: LTUS	DATE: JAN-02-2007
CHECKED BY: SANJEEV	DATE: JAN-02-2007
APPROVED BY: SANJEEV	DATE: JAN-02-2007
TITLE: LC-ST MM DX 50/125um, 10-GIG 2mm	