


CABLE ASSEMBLIES

LC-ST MM Duplex 62.5µm

NOTES:

1) SPC GR-326 GEOMETRIC REQUIREMENTS=> PROTRUSION /UNDERCUT:+50/-100nm

PERFORMANCE SPECIFICATIONS	
FIBER TYPE: MULTIMODE (62.5/125µm)	
INSERTION LOSS	850/1310nm
TYPICAL INSERTION LOSS	0.3dB
MATING DURABILITY (500 cycles)	0.2dB
TEMPERATURE RANGE	<0.2dB
	-40° C to 85° C

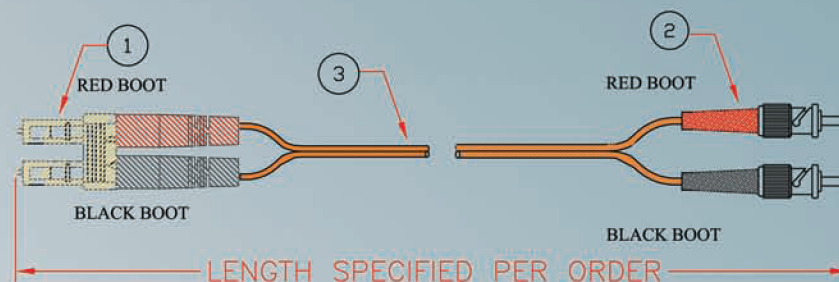

ITEM	QTY.	DESCRIPTION	DRAWN BY:	DATE:	P/N: LEGEND
1	2	LC DUPLEX MULTIMODE 127µm CONNECTOR	LIBB	JAN-02-2007	N = INCHES
2	2	ST MULTIMODE 127µm CONNECTOR	CHECKED BY: SANJEEV	DATE: JAN-02-2007	F = FEET
3	1	CORNING MULTIMODE DUPLEX 62.5/125µm OFNR 3mm	APPROVED BY: SANJEEV	DATE: JAN-02-2007	M = METER
4		N/A	TITLE: LC-ST MM DX 62.5/125µm OFNR 3mm		

MEASUREMENT	DESCRIPTION	AVAILABILITY
1 METER	LC-ST, MM62.5µm ORANGE DX PVC	STOCK
2 METER	LC-ST, MM62.5µm ORANGE DX PVC	STOCK
3 METER	LC-ST, MM62.5µm ORANGE DX PVC	STOCK
4 METER	LC-ST, MM62.5µm ORANGE DX PVC	STOCK
5 METER	LC-ST, MM62.5µm ORANGE DX PVC	STOCK
6 METER	LC-ST, MM62.5µm ORANGE DX PVC	STOCK
7 METER	LC-ST, MM62.5µm ORANGE DX PVC	STOCK
8 METER	LC-ST, MM62.5µm ORANGE DX PVC	STOCK
9 METER	LC-ST, MM62.5µm ORANGE DX PVC	STOCK
10 METER	LC-ST, MM62.5µm ORANGE DX PVC	STOCK
12 METER	LC-ST, MM62.5µm ORANGE DX PVC	STOCK
15 METER	LC-ST, MM62.5µm ORANGE DX PVC	STOCK
20 METER	LC-ST, MM62.5µm ORANGE DX PVC	STOCK
25 METER	LC-ST, MM62.5µm ORANGE DX PVC	STOCK
30 METER	LC-ST, MM62.5µm ORANGE DX PVC	STOCK