


CABLE ASSEMBLIES

SC-SC MM Duplex 10Gig Aqua/OM3

NOTES:
1) SPC GR-326 GEOMETRIC
REQUIREMENTS >> PROTRUSION/UNDERCUT:+50/-100um

PERFORMANCE SPECIFICATIONS	
FIBER TYPE: MULTIMODE (50/125um)	
INSERTION LOSS	850/1310nm
TYPICAL INSERTION LOSS	0.3dB
MATING DURABILITY (500 cycles)	<0.2dB
TEMPERATURE RANGE	-40° C to 85° C

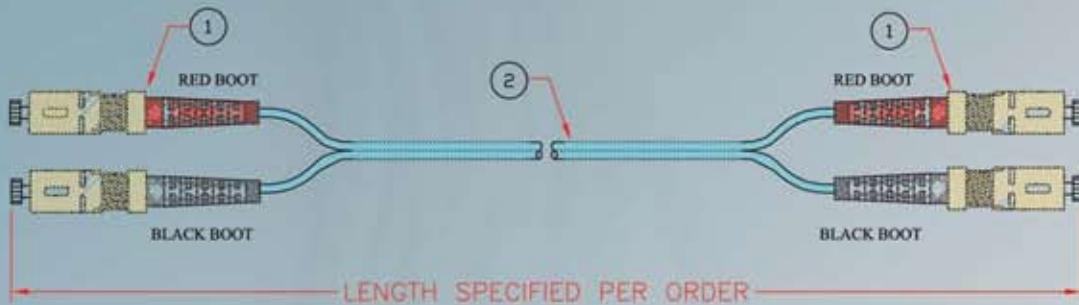

CORNING OPTICAL FIBER CABLE 50/125um, 10-GIG AQUA OFNR ZIPCORD 3.00mm
REQUIRED LENGTH TOLERANCE: +10.0cm / -0.0cm

ITEM	QTY.	DESCRIPTION	DRAWN BY	DATED	PIN LEGEND
1	4	SC MULTIMODE 127um CONNECTOR	CLCB	100-01-2001	
2	1	CORNING MULTIMODE DUPLEX 50/125um 10-GIG OFNR 3mm	CLCB	100-01-2001	
3	N/A		CLCB	100-01-2001	
4	N/A		CLCB	100-01-2001	
TITLE: SC-SC MM DX 50/125um 10-GIG OFNR 3mm					N = INCHES F = FEET M = METER

	MEASUREMENT	DESCRIPTION	AVAILABILITY
1	METER	SC-SC, MM 10G DX AQUA	IN STOCK
2	METER	SC-SC, MM 10G DX AQUA	IN STOCK
3	METER	SC-SC, MM 10G DX AQUA	IN STOCK
4	METER	SC-SC, MM 10G DX AQUA	IN STOCK
5	METER	SC-SC, MM 10G DX AQUA	IN STOCK
6	METER	SC-SC, MM 10G DX AQUA	IN STOCK
7	METER	SC-SC, MM 10G DX AQUA	IN STOCK
8	METER	SC-SC, MM 10G DX AQUA	IN STOCK
9	METER	SC-SC, MM 10G DX AQUA	IN STOCK
10	METER	SC-SC, MM 10G DX AQUA	IN STOCK
12	METER	SC-SC, MM 10G DX AQUA	IN STOCK
15	METER	SC-SC, MM 10G DX AQUA	IN STOCK
20	METER	SC-SC, MM 10G DX AQUA	IN STOCK
25	METER	SC-SC, MM 10G DX AQUA	IN STOCK
30	METER	SC-SC, MM 10G DX AQUA	IN STOCK