


CABLE ASSEMBLIES

SC-SC MM Duplex 62.5µm

NOTES:

1) SPC GR-326 GEOMETRIC REQUIREMENTS=> PROTRUSION / UNDERCUT: +50/-100nm

PERFORMANCE SPECIFICATIONS	
FIBER TYPE: MULTIMODE (62.5/125µm)	
INSERTION LOSS	850/1310nm
TYPICAL INSERTION LOSS	0.3dB
MATING DURABILITY (500 cycles)	0.2dB
TEMPERATURE RANGE	<0.2dB
	-40° C to 85° C

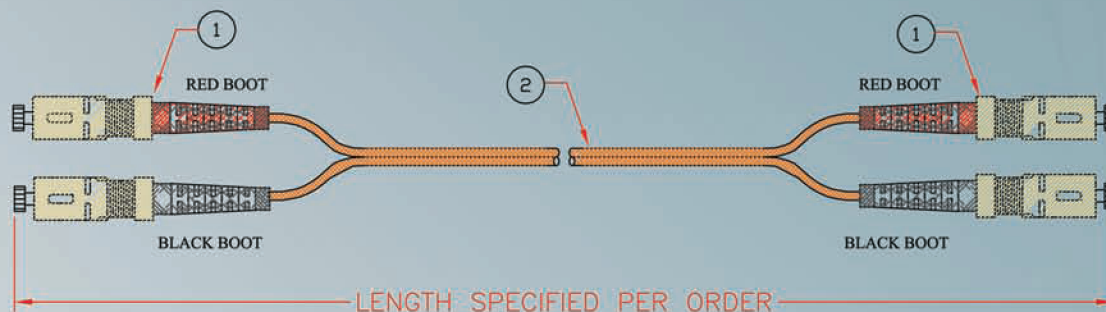

CORNING OPTICAL FIBER CABLE 62.5/125µm OFNR ZIPCORD 3.00mm

REQUIRED LENGTH TOLERANCE: +10.0cm / -0.0cm

ITEM	QTY.	DESCRIPTION	DRAWN BY:	DATE:	
1	4	SC MULTIMODE 127µm CONNECTOR	LIBB	JAN-02-2007	
2	1	CORNING MULTIMODE DUPLEX 62.5/125µm OFNR 3mm	CHECKED BY:	DATE:	
3		N/A	SANDEEV	JAN-02-2007	
4		N/A	APPROVED BY:	DATE:	
			SANDEEV	JAN-02-2007	
			TITLE:		P/N: LEGEND
			SC-SC MM DX		N = INCHES
			62.5/125µm OFNR 3mm		F = FEET
					M = METER

MEASUREMENT	DESCRIPTION	AVAILABILITY
1 METER	SC-SC, MM 62.5µm ORANGE DX PVC	STOCK
2 METER	SC-SC, MM 62.5µm ORANGE DX PVC	STOCK
3 METER	SC-SC, MM 62.5µm ORANGE DX PVC	STOCK
4 METER	SC-SC, MM 62.5µm ORANGE DX PVC	STOCK
5 METER	SC-SC, MM 62.5µm ORANGE DX PVC	STOCK
6 METER	SC-SC, MM 62.5µm ORANGE DX PVC	STOCK
7 METER	SC-SC, MM 62.5µm ORANGE DX PVC	STOCK
8 METER	SC-SC, MM 62.5µm ORANGE DX PVC	STOCK
9 METER	SC-SC, MM 62.5µm ORANGE DX PVC	STOCK
10 METER	SC-SC, MM 62.5µm ORANGE DX PVC	STOCK
12 METER	SC-SC, MM 62.5µm ORANGE DX PVC	STOCK
15 METER	SC-SC, MM 62.5µm ORANGE DX PVC	STOCK
20 METER	SC-SC, MM 62.5µm ORANGE DX PVC	STOCK
25 METER	SC-SC, MM 62.5µm ORANGE DX PVC	STOCK
30 METER	SC-SC, MM 62.5µm ORANGE DX PVC	STOCK